

HD10 Series Handle

Product Features

- HD10 industrial handle is ergonomically designed, provides a high degree of comfort, highly integrated, multi-channel buttons control output, and the handle can be installed with a variety of accessories: analog output finger dial wheel, self-locking button, self-resetting button.
- With different combinations to meet the industry's needs: solenoid valve amplifier control, variable frequency motor control. We can customize satisfied technical parameters according to your requirements.

Application

HD10 handle use PA66 + 305GF, with excellent high temperature performance, can be installed in SJ100, SJ300, SJO1, and SJO2 to achieve multi-axis control Handle operating .

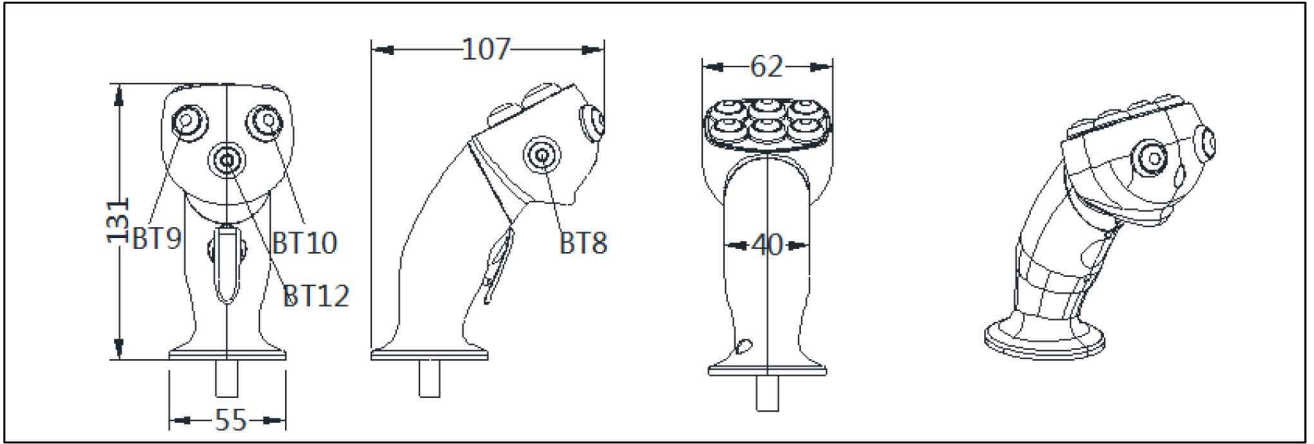
Information

Environment Parameter

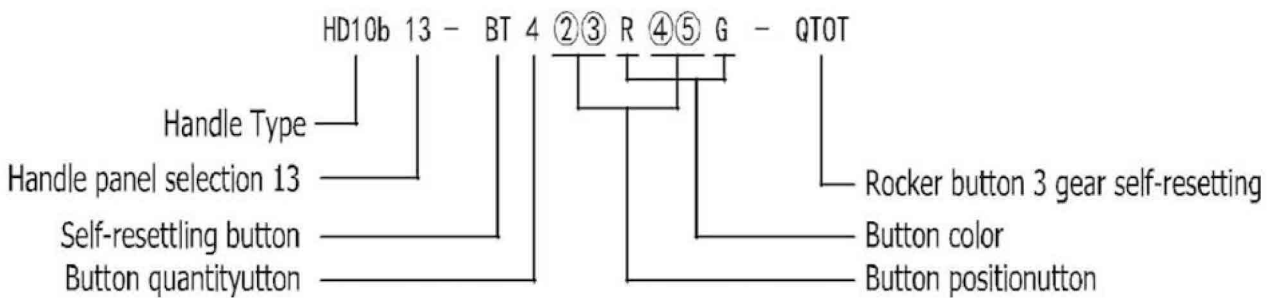
Storage temperature	-40℃~+85℃
Operating temperature	-40℃~+85℃
Protection grade	IP64/65
Meet	IEC68 2-30



PRODUCT CONFIGURATION



HD10a		No Dead man's button
HD10b		Dead man's button















































Button selection reference table 2-1

①②③④⑤⑥⑦ means button

YS100 means finger switch

Q1, Q2 means rock switch

							
1	2	3	4	5	6	7	8
							
9	10	11	12	13	14	15	16
							
17	18	19	20	21	22	23	24
							
25	26	27	28	29	30	31	32
							
33	34	35	36	37	38	39	40
							
41	42	43	44				