

Forklift Joystick

Product Features

- Spring return, dual axis for any direction or cross direction
- Hall or Potentiometer available
- Comfortable operating

Technical Information

Mechanical features

Travel angle	$\pm 30^\circ$
Operating type	Spring return
Breakout force	9N
Maximum allowable force	>300N
Expecting life	>3 million times (Hall)
Weight	200g/260g


Application

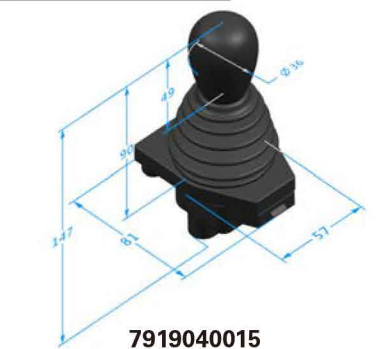
Used on forklift truck and other engineering vehicles, especially for Linde forklift.

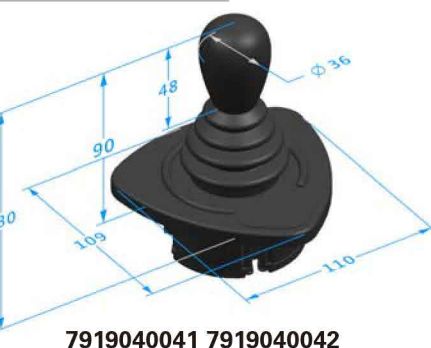
Environmental data

Operating Temperature	-30°C~ +70°C
Storage Temperature	-40°C~ +85°C
Protection level	IP65 (Above the flange)



Dimensions	Application	Electrical data						
 <p>7919040012</p>	<p>1120, 386-02, 387, 388, 392-02, 393-02, 394-01, 394-02, 396-02</p>	<p>Potentiometer</p> <table border="1"> <tr> <td>Power supply</td> <td>20-80%Vdc</td> </tr> <tr> <td>Limiting allowable power consumption</td> <td>0.125W</td> </tr> <tr> <td>Output linearity tolerance</td> <td>< ± 5%</td> </tr> </table>	Power supply	20-80%Vdc	Limiting allowable power consumption	0.125W	Output linearity tolerance	< ± 5%
Power supply	20-80%Vdc							
Limiting allowable power consumption	0.125W							
Output linearity tolerance	< ± 5%							

Dimensions	Application	Electrical data										
 <p>7919040015</p>	<p>1120, 386-02, 387, 388, 392-02, 393-02, 394-01, 394-02, 396-02</p>	<p>Hall</p> <table border="1"> <tr> <td>Power supply</td> <td>5.0 ± 0.5Vdc</td> </tr> <tr> <td>Supply current</td> <td><44mA (Rated supply voltage)</td> </tr> <tr> <td>Supply voltage maximum</td> <td>30Vdc</td> </tr> <tr> <td>Reverse polarity voltage (max)</td> <td>-15Vdc</td> </tr> <tr> <td>Output linearity tolerance</td> <td>< ± 4%</td> </tr> </table>	Power supply	5.0 ± 0.5Vdc	Supply current	<44mA (Rated supply voltage)	Supply voltage maximum	30Vdc	Reverse polarity voltage (max)	-15Vdc	Output linearity tolerance	< ± 4%
Power supply	5.0 ± 0.5Vdc											
Supply current	<44mA (Rated supply voltage)											
Supply voltage maximum	30Vdc											
Reverse polarity voltage (max)	-15Vdc											
Output linearity tolerance	< ± 4%											

Dimensions	Application	Electrical data						
 <p>7919040041 7919040042</p>	<p>351 series, 352 series</p>	<p>Potentiometer</p> <table border="1"> <tr> <td>Power supply</td> <td>20-80%Vdc</td> </tr> <tr> <td>Limiting allowable power consumption</td> <td>0.125W</td> </tr> <tr> <td>Output linearity tolerance</td> <td>< ± 5%</td> </tr> </table>	Power supply	20-80%Vdc	Limiting allowable power consumption	0.125W	Output linearity tolerance	< ± 5%
Power supply	20-80%Vdc							
Limiting allowable power consumption	0.125W							
Output linearity tolerance	< ± 5%							